



CAGE: 8RC72 DUNS: 043893696

# CS-5 SUPPRESSOR

Caliber: 5.56 NATO

3D printed monolithic design using a nickel based Super Alloy Haynes 282, the CS-5 is one of the most durable suppressors on the market to date. The CS-5 is capable of sustained full-automatic fire while providing operators with sound, thermal, and flash mitigation. A semi-auto rated version is also available in Ti6Al4V.

The CS-5 utilizes a forward venting monolithic design controlling cyclic rate while the assist ports reduce back pressure. The CS-5 is protected by a high-temp Cerakote coating, providing protection and a higher level of concealability. Alphatek Alphashield IR Reflective coating available

## PRODUCT DETAILS

SKU#	CS5 or CS5TI
CALIBER	5.56 NATO
MATERIAL	Haynes 282 or Ti6Al4V
COATING	High Temp Cerakote or Alphatek Alphashield IR
ATTACHMENT METHOD	1.375-24 HUB Mount
SIGNATURE REDUCTION	Flash Sound Ground Disturbance Thermal


**BREATHABLE TECHNOLOGY™**

## MEASUREMENTS


	imperial	metric
SUPPRESSOR LENGTH	5.0 in	12.7 cm
SUPPRESSOR DIAMETER	1.75 in Max OD	4.45 cm
	1.6 HUB OD	4.06 cm
SUPPRESSOR WEIGHT	14 oz/ 8 oz TI	.49kg/ .23kg Ti



Suppressor pictured with factory installed HUB mount

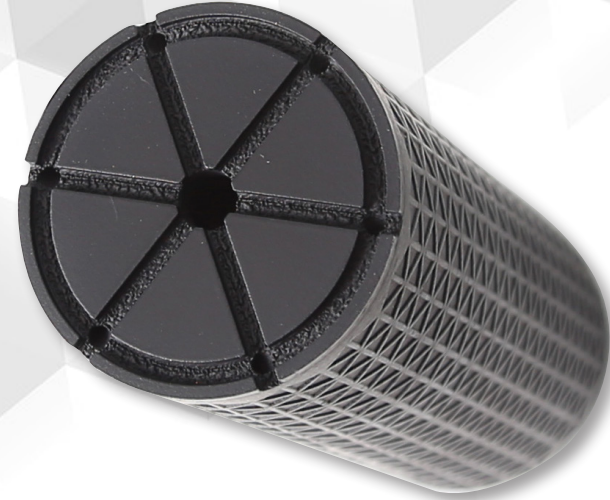

**KFM TAPER LOCK FLASH HIDER AND 1.375-24 RD HUB MOUNT INCLUDED**

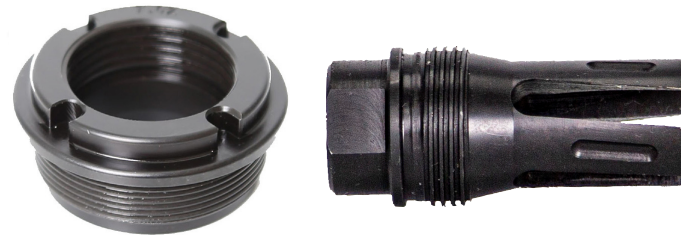

## RD HUB MOUNT

MEASUREMENTS	imperial	metric
ADDED LENGTH	.280 in	.71 cm
ADDED WEIGHT	2.61 oz	73.92 g

\*Weights and dimensions may vary based on manufacturing tolerances.