



CAGE: 8RC72 DUNS: 043893696

# LS-3 SUPPRESSOR

Caliber: .300 Blackout to .300 Win Mag

3D printed monolithic design using a nickel based Super Alloy Haynes 282, the LS-3 is one of the most durable suppressors on the market to date. The LS-3 is capable of sustained full-automatic fire while providing operators with sound, thermal, and flash mitigation. A semi-auto rated version is also available in Ti6Al4V.

The LS-3 utilizes a forward venting monolithic design controlling cyclic rate while the assist ports reduce back pressure. The LS-3 is protected by a high-temp Cerakote coating, providing protection and a higher level of concealability. Alphatek Alphashield IR Reflective coating available

## PRODUCT DETAILS


SKU#	LS3 or LS3TI
CALIBER	.300 Blackout to .300 Win Mag
MATERIAL	Haynes 282 or Ti6Al4V
COATING	High Temp Cerakote or Alphatek Alphashield IR
ATTACHMENT METHOD	1.375-24 Hub Mount
SIGNATURE REDUCTION	Flash Sound Ground Disturbance Thermal

## BREATHABLE TECHNOLOGY™


MEASUREMENTS*	imperial	metric
SUPPRESSOR LENGTH	7.5 in	19.05 cm
SUPPRESSOR WEIGHT	17.5 oz Haynes	.50 kg
	8.6 oz Ti64	.25 kg
SUPPRESSOR DIAMETER	1.6 in	4.06 cm



Suppressor pictured with factory installed HUB mount

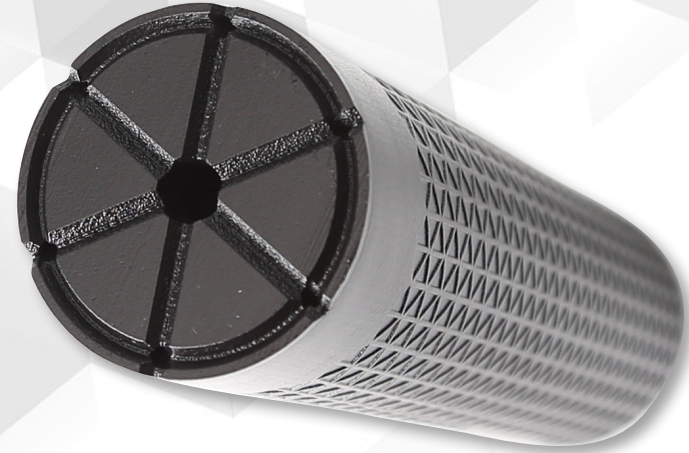

## KFM TAPER LOCK FLASH HIDER AND 1.375-24 RD HUB MOUNT INCLUDED

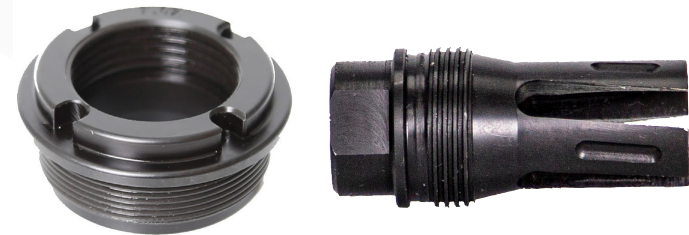

## RD HUB MOUNT

MEASUREMENTS*	imperial	metric
ADDED LENGTH	.280 in	.71 cm
ADDED WEIGHT	2.61 oz	73.92 g

\*Weights and dimensions may vary based on manufacturing tolerances.