



CAGE: 8RC72 DUNS: 043893696

LS-5 SUPPRESSOR

Caliber: 5.56 NATO

3D printed monolithic design using a nickel based Super Alloy Haynes 282, the LS-5 is one of the most durable suppressors on the market to date. The LS-5 is capable of sustained full-automatic fire while providing operators with sound, thermal, and flash mitigation. A semi-auto rated version is also available in Ti6Al4V.


The LS-3 utilizes a forward venting monolithic design controlling cyclic rate while the assist ports reduce back pressure. The LS-5 is protected by a high-temp Cerakote coating, providing protection and a higher level of concealability. Alphatek Alphashield IR Reflective coating available

PRODUCT DETAILS

SKU#	LS5 or LS5TI
CALIBER	5.56 NATO
MATERIAL	Haynes 282 or Ti6Al4V
COATING	High Temp Cerakote or Alphatek Alphashield IR
ATTACHMENT METHOD	1.375-24 Hub Mount
SIGNATURE REDUCTION	Flash Sound Ground Disturbance Thermal

BREATHABLE TECHNOLOGY™

MEASUREMENTS	imperial	metric
LENGTH	7.0 in	17.78 cm
WEIGHT	20 oz Haynes	.55 kg
	10.5 oz Ti	.30 kg
DIAMETER	1.75 in	4.45 cm

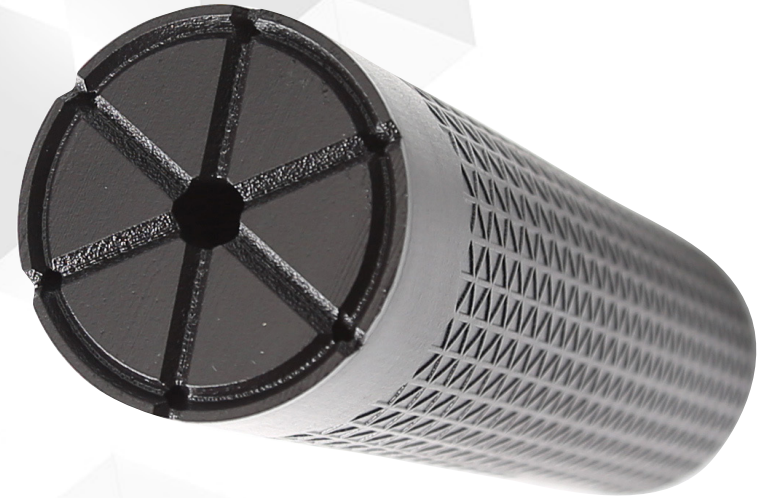

KFM TAPER MOUNT FLASH HIDER AND 1 3/8"X24 HUB ADAPTER INCLUDED

